
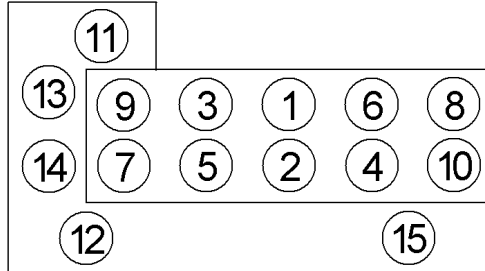


| | | |
|--|---|---|
| Anziehvorschrift für Zylinderkopf | 423.590 |  Das Original |
| Tightening Instructions for Cylinder Head | | |
| Instructions de serrage pour culasse | | |
| Prescripciones de apriete para culatas | | |
| | passend für / suitable for adaptable à / adaptable a | Nissan |

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



709.940
M 10 x 96



| | | |
|---|--|------------------------------|
| Anziehen/ Tightening/ Serrage/ Apriete | POS. 1 - 10 * 25 Nm 59 Nm <input type="checkbox"/> 29 Nm <input checked="" type="checkbox"/> 50° - 55° | POS. 11 - 15 * 6,8 - 8 Nm |
|---|--|------------------------------|

Zeichenerklärung / Explanations / Explication / Explicacion

| | | | | |
|---------------------------------------|---|------------------------------|--------------------------------|---------------------------------------|
| * <input checked="" type="checkbox"/> | neue Zylinderkopfschrauben verwenden | use new cylinder head bolts | utiliser des vis neuves | emplar tornillos nuevos |
| * <input checked="" type="checkbox"/> | Warmlauf (80°C) | warm up time (80°C) | chauffage (80°C) | calentamiento (80°C) |
| <input type="checkbox"/> | Schrauben einzeln lösen und wieder anziehen | loosen and tighten each bolt | deserrer et serrer vis par vis | aflojar y apretar tornillo a tornillo |
| ● | Setzzeit | relaxation time | durée de tassement | tiempo de espera |
| ➤ | Drehwinkel | torque angle | angle de serrage | ángulo de giro |

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 75mm; ɸ: 1,2mm

Mot: GA14DE, GA14DS

1,4 ltr.

55-64 kW (75-87 PS)

Almera I, Sunny III

ElringKlinger AG, Max-Eyth-Str.2
72581 Dettingen / Erms. Tel. 07123/724 601

423.590